


NVE Valves with Actuators | Hydraulic Spring Closed

Features

- Steel or Stainless Steel Body; Stainless Steel Stem, Seat, Gate and Guide are Standard.
- Viton Seals Standard; Viton O-Ring Seal on Seat; Other O-Ring Materials Available.
- Completely Re-buildable and Self-Cleaning; accepts TTMA and ANSI Flanges.
- MAWP 100 PSI; Burst Pressure greater than 400 PSI.

Actuator

- Assembly features Stainless Steel Bracket and Fasteners; Powder Coat Painted Parts.
- Replaceable Seals; and a Million-Cycle Spring. Maximum Cylinder Operating Pressure 500 PSI.

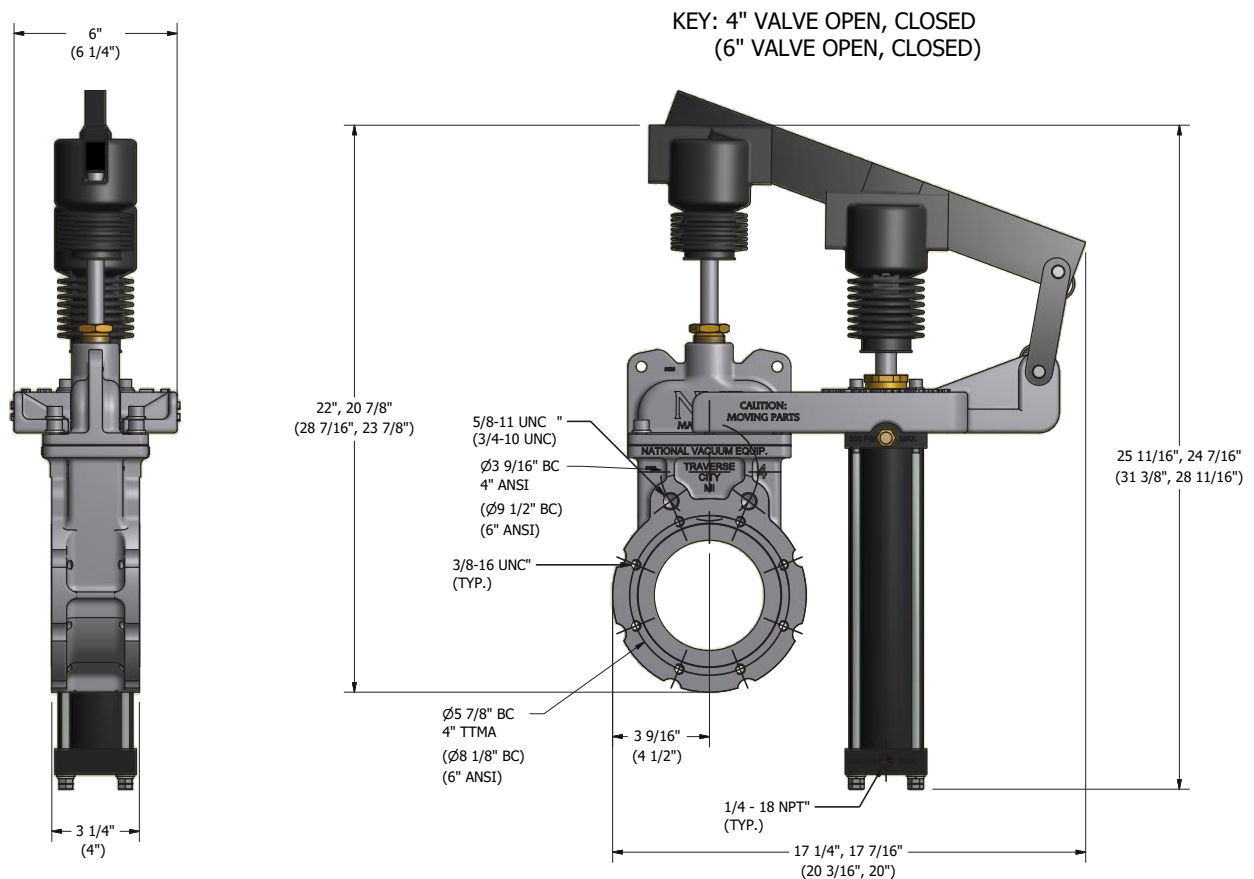

NVE Piston Gate Valve with Spring Close Hydraulic Cylinder | Parts List

PART NUMBER	DESCRIPTION	WEIGHT	PRICE
180-4C2	NVE 4" - CS 2.5 SPRING HS	64 lbs	\$1,715.00
180-4S2	NVE 4" - SS 2.5 SPRING HS	63 lbs	\$1,860.00
180-6C2	NVE 6" - CS 2.5 SPRING HS	98 lbs	\$2,436.01
180-6S2	NVE 6" - SS 2.5 SPRING HS	98 lbs	\$2,787.22