


Features

- Steel or Stainless Steel Body; Stainless Steel Stem, Seat, Gate and Guide are Standard;
- Viton Seals Standard; Viton O-Ring Seal on Seat; Other O-Ring Materials Available;
- Completely Rebuildable and Self-Cleaning; accepts TTMA and ANSI Flanges.
- MAWP 100 PSI; Burst Pressure greater than 400 PSI. Dual Gate version available for applications requiring horizontal mounting or with high contents of solids.

Actuator

- Actuator Assembly features Stainless Steel Bracket and Fasteners; Powder Coat Painted Parts;
- Self-Lubricating Cylinder; Replaceable Seals; and a Million-Cycle Spring.
- Maximum Cylinder Operating Pressure 150 PSI.

KEY: 4" VALVE OPEN, CLOSED (6" VALVE OPEN, CLOSED)

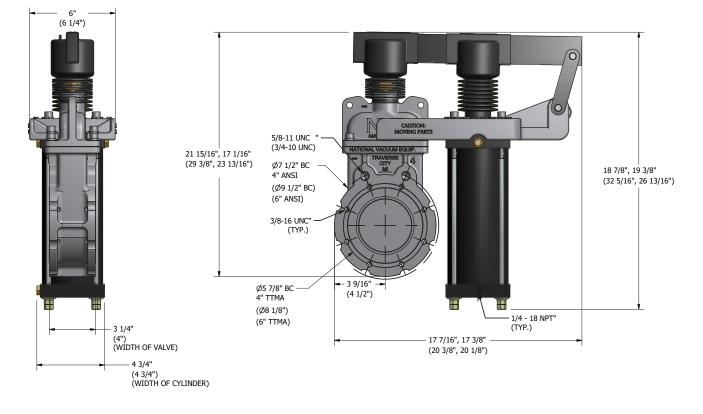

NVE Piston Gate Valve with Spring Close Pneumatic Cylinder | Parts List

PART NUMBER	DESCRIPTION	PRICE	WEIGHT
180-4C1	NVE 4" - CS - PNEUMATIC / SC	\$1,628.82	65 lbs
180-451	NVE 4" - SS - PNEUMATIC / SC	\$1,835.60	65 lbs
180-6C1	NVE 6" - CS - PNEUMATIC / SC	\$2,340.62	107 lbs
180-651	NVE 6" - SS - PNEUMATIC / SC	\$2,695.00	107 lbs