

NVE Valves with Actuators | Pneumatic Spring Closed with Indicator




Features

- Steel or Stainless Steel Body; Stainless Steel Stem, Seat, Gate and Guide are Standard.
- Viton Seals Standard; Viton O-Ring Seal on Seat; Other O-Ring Materials Available.
- Completely Re-buildable and Self-Cleaning; accepts TTMA and ANSI Flanges.
- MAWP 100 PSI; Burst Pressure greater than 400 PSI. Dual Gate version available for applications requiring horizontal mounting or with high contents of solids.

Actuator

- Assembly features Stainless Steel Bracket and Fasteners; Powder Coat Painted Parts.
- Self-Lubricating Cylinder; Replaceable Seals; and a Million-Cycle Spring.
- Maximum Cylinder Operating Pressure 150 PSI.

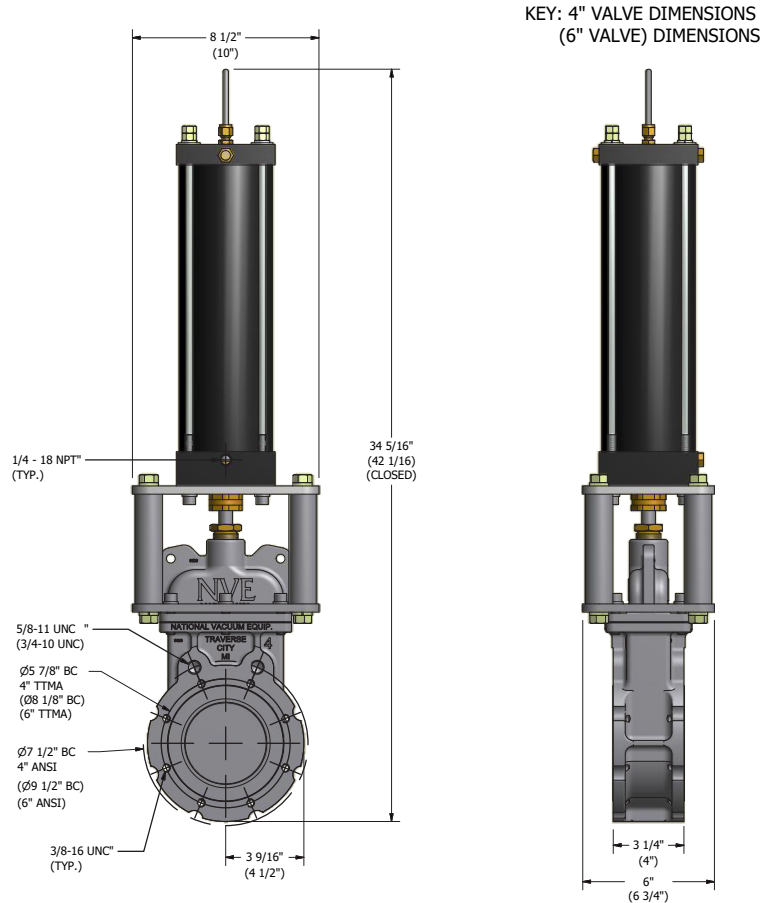

NVE Top Mount Piston Gate Valve with Spring Close Pneumatic Cylinder | Parts List

PART NUMBER	DESCRIPTION	WEIGHT	PRICE
180-4CTMI	NVE 4" - CARBON ASSEMBLY - TOP MOUNT WITH INDICATOR	66 lbs	\$1,627.40
180-4STMI	NVE 4" - STAINLESS STEEL ASSEMBLY - TOP MOUNT WITH INDICATOR	65 lbs	\$2,258.17
180-6CTMI	NVE 6" - CARBON ASSEMBLY - TOP MOUNT WITH INDICATOR	94 lbs	\$2,448.23
180-6STMI	NVE 6" - STAINLESS STEEL ASSEMBLY - TOP MOUNT WITH INDICATOR	93 lbs	\$2,737.87