



324 Leaside Avenue
Stoney Creek, ON Canada L8E 2N7
Tel: 905-662-6552 / TF: 1-800-663-9003
Fax: 905-662-5412

www.fruitlandmanufacturing.com

Performance and Reliability

172 & 344 SERIES

Model 172



Model 344




Available in left hand or right hand rotation, comes with 4 way diverter valve with various drive options available. The RCF 172 & RCF 344 series pump is primarily used on trucks servicing light septic and portable toilet applications.

Specifications	RCF 172	RCF 344
Free Air Flow	127 CFM	218 CFM
Maximum Vacuum	27" Hg*	27" Hg
Power Required @ 27"Hg	7 HP	12 HP
Pressures up to	20 PSI	20 PSI
Power required @ Max. Pressure	10 HP	16 HP
Connection Sizes	2" (Hose Barb)	2" (Hose Barb)
Operating Speed	1400 RPM	1400 RPM
Lubrication (Oil Pump)	Automatic	Automatic
Vanes	4 (Kevlar)	4 (Kevlar)
Cooling System	Air Cooled	Air Cooled + Air Injected
Approx. net Pump weight	128 LBS	182 LBS


* 20" Hg for Continuous Duty

RCF Model Nomenclature:

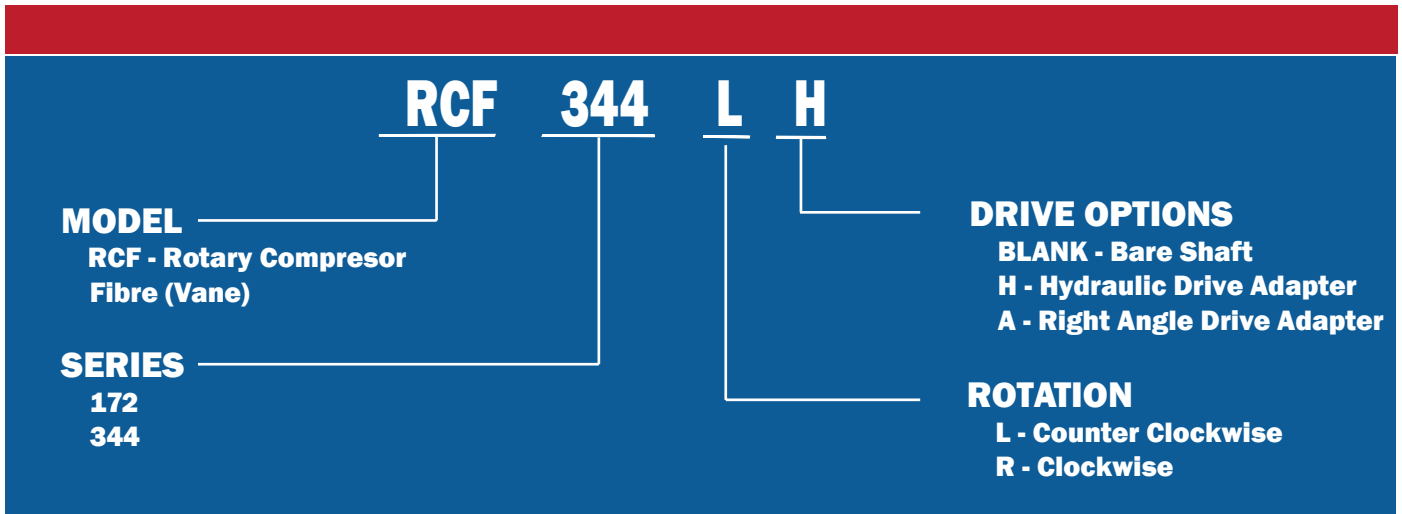

Dimensions:

RCF 172 PUMP

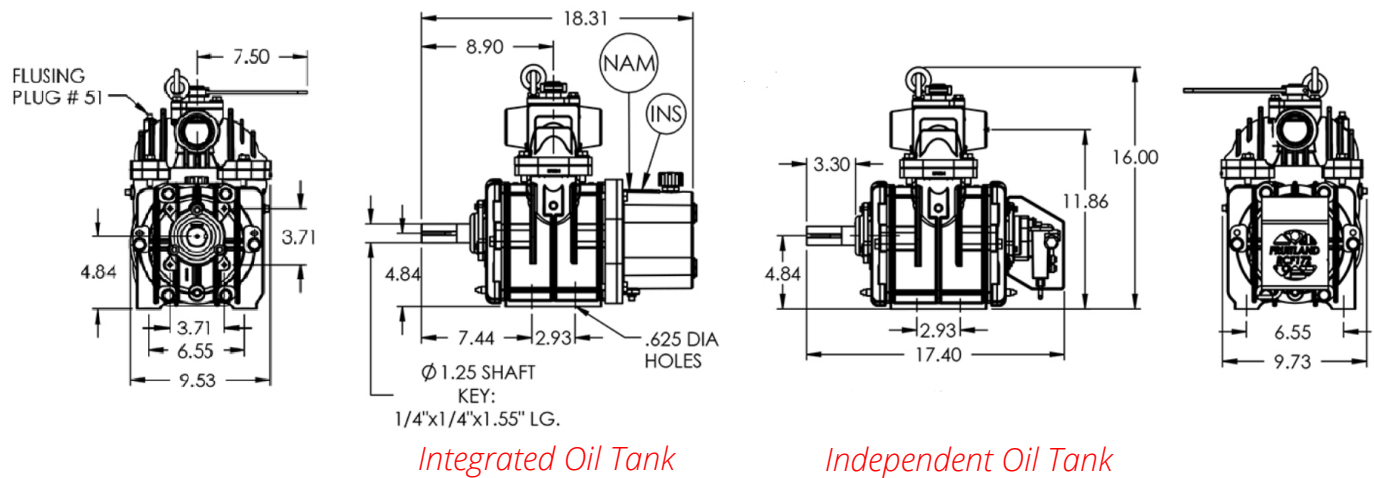

RCF 344 PUMP

